

# Accutech TM10

## Wireless Turbine Meter Totaliser Field Unit



### Product at a glance

The Accutech™ TM10 wireless turbine meter field unit measures the volumetric flow rate of liquids or gases by detecting the frequency of pulses generated with a standard turbine meter (not included) and applying a user-configured proportional “K” factor. A 22-point correction curve is used as a final offset or for custom calibration of turbine meter as required. There are two principal outputs providing flow rate and totalised flow measurements.

Accutech field units automatically report field data to a centralized Accutech base radio over distances of up to 3000 ft. (~1000 m). Each field unit is self-contained, featuring an integrated 900 MHz or 2.4 GHz (license-free band), frequency-hopping, spread-spectrum transceiver and antenna, and long-lasting battery that offers 5+ years of maintenance-free service (up to 10 years depending on data rates and battery options). Accutech networks are highly scalable with the possibility of 100 field units per base radio and 256 base radios per installation. Accutech field units are housed within a weather-resistant NEMA 4X enclosure with options for a remote sensor and remote antenna on select models. Field units are available in a wide range of certifications and come.

# Accutech TM10

## Wireless Turbine Meter Totaliser Field Unit

### Specifications - Accutech TM10

#### General

Sensor Type	Turbine Meter Totaliser
Location	Field Unit
Frequency Range	900 MHz and 2.4 GHz license-free bands

#### Functional

##### Turbine Meter

Frequency Range	4 Hz...10 KHz
Electronic Accuracy and Stability	<ul style="list-style-type: none"> <li>• Flow Rate accurate to <math>\pm 0.01\%</math> of reading (not including turbine meter and pickup)</li> <li>• Applies to pulse frequencies above low cut-off of 4 Hz</li> </ul>
Physical Connection	1 in. female NPT connection to Turbine Meter Union for easy removal, pickup installation and replacement
Magnetic Pickup	Two-wire connector supplied. See supported model numbers in the Sensor Pickup section of the model code
Input Sensitivity (typical)	<ul style="list-style-type: none"> <li>• 3.5 mV RMS @ 5 Hz</li> <li>• 3.5 mV RMS @ 50 Hz</li> <li>• 5 mV RMS @ 500 Hz</li> <li>• 45 mV RMS @ 5000 Hz</li> </ul>
Operating Ambient Environment	<ul style="list-style-type: none"> <li>• -40...+85 °C (-40...+185 °F) electronics</li> <li>• -40...+85 °C (-40...+185 °F) display (below -20 °C LCD visibility reduced)</li> <li>• Humidity: 0...95%, non-condensing</li> </ul>
Materials of Construction	<ul style="list-style-type: none"> <li>• Fittings: 316L Stainless Steel</li> <li>• Epoxy-coated Aluminum enclosure</li> </ul>
Power	<ul style="list-style-type: none"> <li>• Self-contained power with integrated battery</li> <li>• 1: D-cell Lithium Thionyl battery</li> <li>• Battery life up to ten years of service, depending on configuration</li> </ul>
Certifications	<p>North America HAZLOC:</p> <ul style="list-style-type: none"> <li>• cCSAus</li> <li>• Intrinsically Safe: Exia IIC; AEx ia IIC</li> <li>• Class I, Div. 1, Groups A, B, C &amp; D, T3</li> <li>• Class 1, Zone 0, AEx ia IIC, T3</li> <li>• Class I, Div. 2, Groups A, B, C &amp; D, T4</li> </ul> <p>ATEX/IECEX HAZLOC:</p> <ul style="list-style-type: none"> <li>• LCIE</li> <li>• Intrinsically Safe: Ex ia IIC T3</li> </ul> <p>EMC &amp; Radio:</p> <ul style="list-style-type: none"> <li>• North America : FCC , IC</li> <li>• Europe: CE Mark (R&amp;TTE)</li> <li>• Australia: C-Tick</li> </ul>

# Accutech TM10

## Wireless Turbine Meter Totaliser Field Unit

### Common Accutech Field Unit Specifications

#### Features

Local Configuration Interface	<ul style="list-style-type: none"> <li>• Integrated LCD with membrane-switch buttons</li> <li>• Display provides flow, total and detected error messages</li> <li>• Configure sampling and RF parameters locally using membrane-switch buttons</li> </ul>
Remote Configuration Interface	Accutech Manager, Windows®-based GUI software, providing network-wide monitoring and performance-management features and field unit configuration capabilities
Network Capacity	<ul style="list-style-type: none"> <li>• Max. 100 field units per base radio</li> <li>• Max. 256 base radios per network</li> </ul>
Self-Diagnostics	<ul style="list-style-type: none"> <li>• Low battery notification – indicates the need to replace the battery (approximately one month advance notification)</li> <li>• Contains software and hardware that continuously monitors operation. Any sensor or device parameter that is out of specification is identified and reported</li> </ul>
RF Characteristics	<p>900 MHz:</p> <ul style="list-style-type: none"> <li>• 902...928 MHz Frequency Hopping Spread Spectrum (FHSS), FCC certified ISM license-free band</li> <li>• 915...928 MHz (Australia)</li> <li>• Data Rates: 19.2 kbps, and 76.8 kbps</li> <li>• Typical Electrical Transmit Power: 0.4 W maximum</li> </ul> <p>2.4 GHz:</p> <ul style="list-style-type: none"> <li>• 2400...2483.5 MHz license-free band Frequency Hopping Spread Spectrum (FHSS) Radio</li> <li>• Data Rates: 50/100 kbps (FSK Modulation)</li> <li>• Typical Electrical Transmit Power: +10.6 dBm</li> <li>• Typical Receive Sensitivity (0.1 % BER): - 102 dBm @ 50 kbps</li> <li>• Typical CW Receiver Blocking Rejection: 64 dB for CW @ +/- 5 MHz, 74 dB for CW @ +/- 30 MHz</li> </ul>
Operating Shock and Vibration	Tested per IEC 60068-2-6 (vibration) and IEC 60068-2-27 (shock)
Random Vibration Characteristics	Tested to withstand 6 G, 15 minutes per axis from 9...500 Hz
Electromagnetic Compatibility	Operates within specification in fields from 80...1,000 MHz with field strengths to 30 V/m. Meets EN 50082-1 General
Output Resolution	24-bit analog-to-digital conversion

# Accutech TM10

## Wireless Turbine Meter Totaliser Field Unit

### Model Code - Accutech TM10

TBUATMTJ1N00A00NA represents a typical part number.

Model	Type
TBUATM	Wireless Turbine Meter Totaliser Field Unit

Code	Select: RF Module Type
T	902...928 MHz band (FCC / IC)
D	915...928 MHz band (Australia)
F	2.4 GHz band

Code	Select: Certifications
	Intrinsically Safe Protection
J	CSA - see certification details on previous page
Q	ATEX & IECEx - see certification details on previous page

Code	Select: Housing & Battery Pack
1	NEMA 4X Housing with 1 D-cell

Code	Select: Future Option
N	None

Code	Select: Antenna
00	Integral Antenna (2.4 GHz unit comes default with integral antenna and external antenna connector)
04	External Antenna connector (900 MHz only, antenna and cables purchased separately)

Code	Select: Sensor Mounting
A	Integral (direct connect of magnetic pick-up below, or customer-supplied – no Junction Box)
R	Remote Sensor (requires selection of a Junction Box below)

# Accutech TM10

## Wireless Turbine Meter Totaliser Field Unit

### Model Code - Accutech TM10 (cont'd)

TBUATMTJ1N00A00NA represents a typical part number.

Code	Select: Sensor Pickup
00	None (Intrinsic Safety rating "Option J" is available for customer-supplied pick-ups meeting specifications)
01	Magnetic pick-up, Electronic Data Devices model 4.303 - for turbine meters with an I.D. $\geq$ 7/8 in.
02	Magnetic pick-up, Electronic Data Devices model 4.5050 - for turbine meters with an I.D. $\leq$ 3/4 in.

Code	Select: Sensor Union
N	None (customer-supplied)
C	Stainless Steel Union, for Integral Sensor Mounting only (Shipped Assembled)

Code	Select: Junction Box
A	No Junction Box (exposed lead wires)
B	NEMA 4 - Aluminum Rear Entry, for Remote Sensor Mounting only
D	NEMA 4X - Stainless Steel Rear Entry, for Remote Sensor Mounting only


# Accutech TM10

## Wireless Turbine Meter Totaliser Field Unit

Dimensions - Accutech TM10

FRONT VIEW

SIDE VIEW

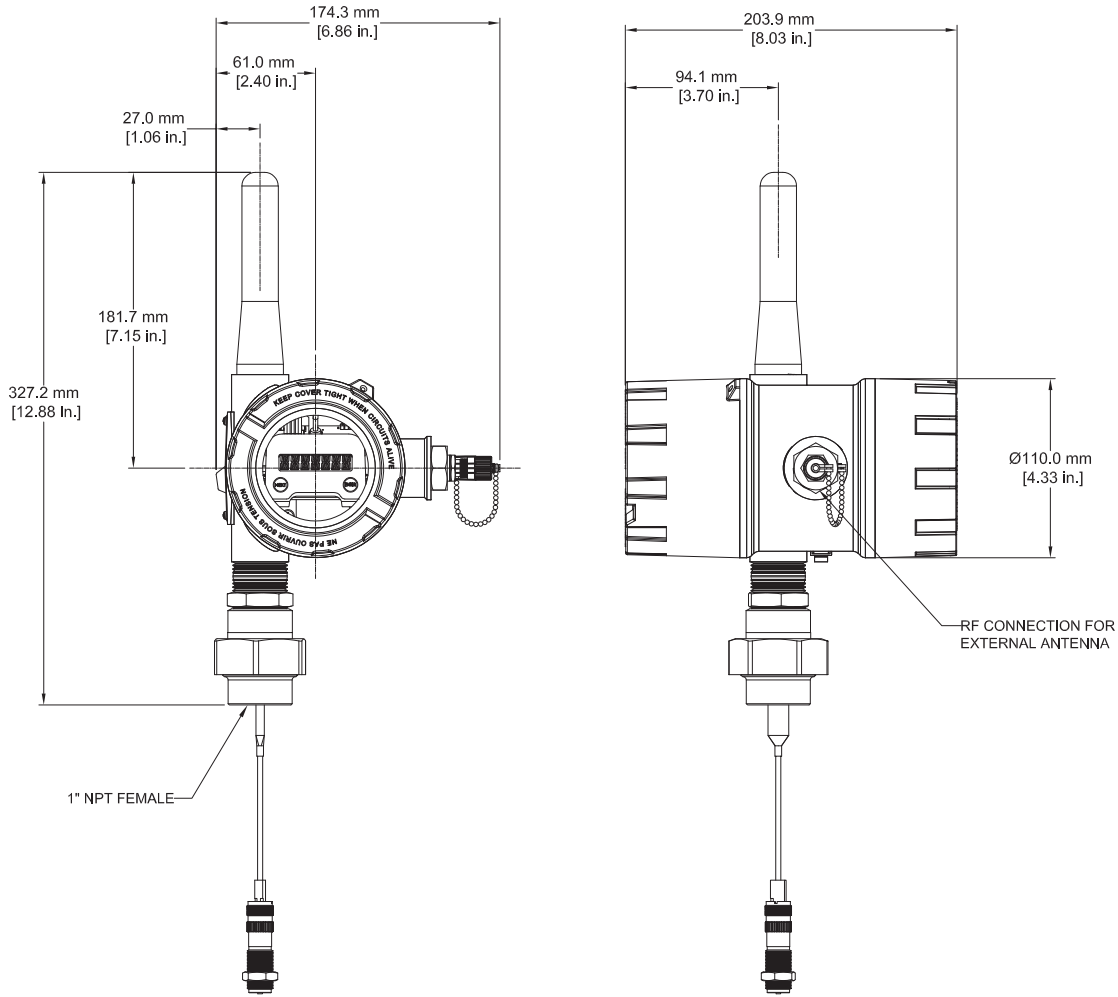

**Note:** This product is RoHS-compliant.

**Disclaimer:** Schneider Electric reserves the right to change product specifications. For ordering information call direct worldwide: +1 (613) 591-1943; Toll Free within North America: +1 (888) 267-2232 or Email: [orderstrss@se.com](mailto:orderstrss@se.com). For more information visit [www.se.com](http://www.se.com).

Foxboro by Schneider Electric  
 38 Neponset Avenue,  
 Foxboro, Massachusetts 02035 USA  
 Direct Worldwide: +1 (508) 549-2424  
 Email: [systems.support@se.com](mailto:systems.support@se.com)  
 Toll Free within North America: +1 (866) 746-6477  
[www.se.com](http://www.se.com)

Life Is On

