

PSTAR Remote-Mounted Pressure Seals with Threaded Process Connection

For use with I/A Series® Pressure Transmitter Models IDP10, IAP10, IGP10, IAP20, and IGP20

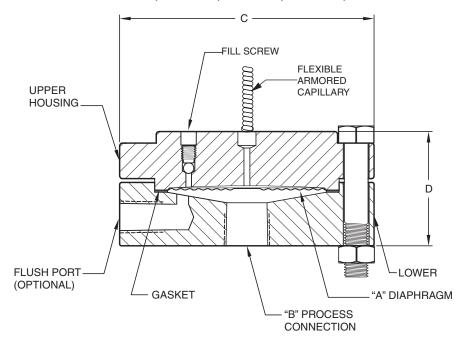

316 ss Flexible Armor lengths between 5 ft (1.5 m) and 50 ft (15.0 m)

Diaphragm Size "A"	Process Connection "B" NPT	Overall Diameter "C"	Height "D" No Flush Port	Height "D" 1/4 NPT Flush Port	Height "D" 1/2 NPT Flush Port
2.4 in	1/4 in	<u>88.9</u> 3.5	48.77	48.77	<u>61.47</u>
	1/2 in	3.5	1.92	1.92	2.42
	3/4 in	<u>88.9</u> 3.5	<u>48.77</u>	<u>48.77</u>	<u>61.47</u>
		3.5	1.92	1.92	2.42
	1 in	<u>88.9</u> 3.5	<u>48.26</u>	<u>48.26</u>	<u>60.96</u>
	1.25 in	3.5	1.9	1.9	2.4
	1.5 in	88.9 3.5	<u>53.34</u> 2.1	<u>53.34</u> 2.1	60.96 2.4



For dimensional information specific to your sales order, refer to Certified Dimensional Prints (CDPs) which can be ordered from your Foxboro Sales Office or authorized factory representative.



Diaphragm Size "A"	Process Connection "B" NPT	Overall Diameter "C"	Height "D" No Flush Port	Height "D" 1/4 NPT Flush Port	Height "D" 1/2 NPT Flush Port
2.9 in	1/4 in 1/2 in	<u>102</u> 4.0	<u>47.24</u> 1.86	<u>47.24</u> 1.86	61.98 2.44
	3/4 in	<u>102</u> 4.0	47.24 1.86	47.24 1.86	61.47 2.42
	1 in 1.25 in	<u>102</u> 4.0	<u>48.26</u> 1.9	<u>48.26</u> 1.9	60.96 2.4
	1.5 in 2 in	<u>102</u> 4.0	<u>53.34</u> 2.1	60.96 2.4	60.96 2.4
4.1	1/4 in 1/2 in 3/4 in	<u>133.35</u> 5.25	<u>50</u> 2.0	<u>50</u> 2.0	<u>59.69</u> 2.35
	1 in 1.25 in	<u>132</u> 5.2	<u>50</u> 2.0	<u>50</u> 2.0	60.96 2.4
	1.50 in 2	<u>132</u> 5.2	<u>53.34</u> 2.1	<u>53.34</u> 2.1	60.96 2.4

Invensys Operations Management 5601 Granite Parkway Suite 1000 Plano, TX 75024 www.iom.invensys.com

Invensys, Foxboro, and I/A Series are trademarks of Invensys plc, its subsidiaries, and affiliates.

All other brand names may be trademarks of their respective owners.

Global Client Support

Inside U.S.: 1-866-746-6477
Outside U.S.: 1-508-549-2424 or contact your local Foxboro representative.
Website: http://support.ips.invensys.com

Copyright 2001-2012 Invensys Systems, Inc. All rights reserved

1212